
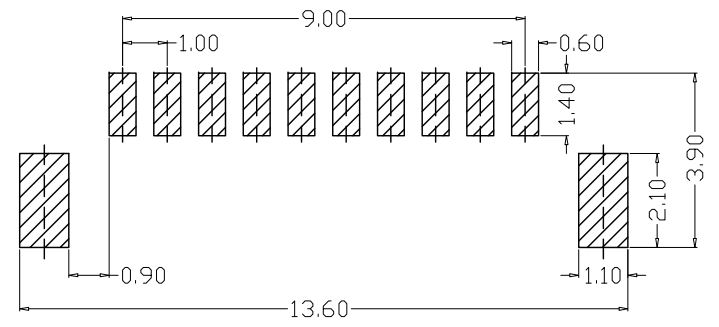
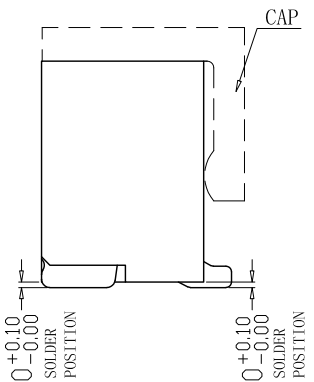
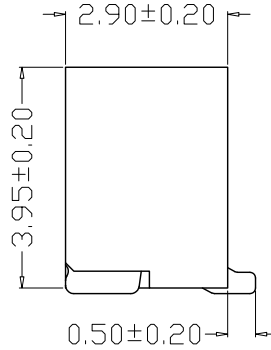
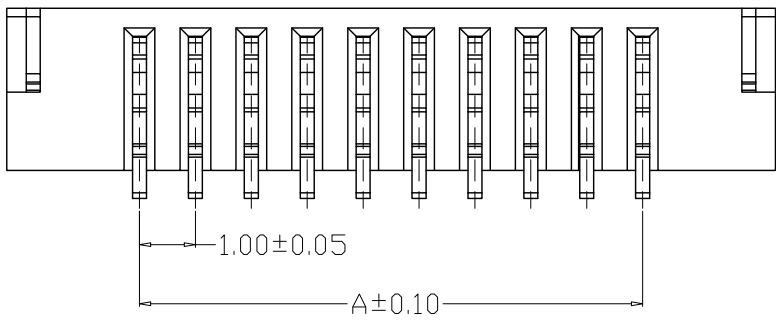
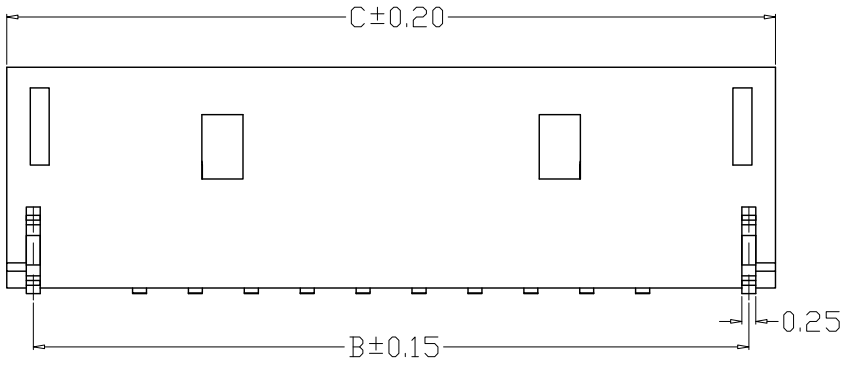
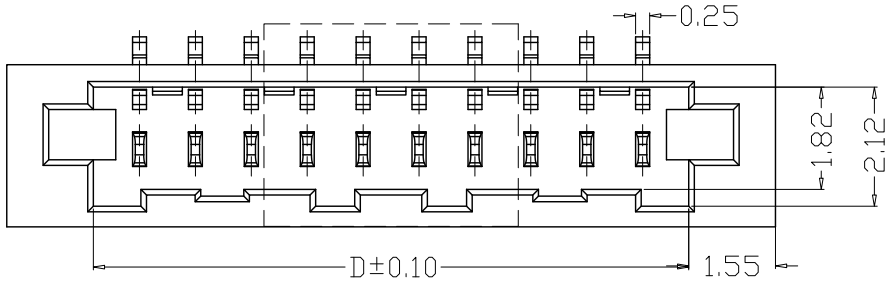


版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- 1、Current Rating: 1.5A AC, DC
- 2、Voltage Rating: 150V AC, DC
- 3、Temperatuer Range: -25°C~+130°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 900V AC/minute
- 7、Material
 Wafer: LCP UL94V-0
 PIN: C5191 Tin-plated
 Fixed piece: C2680 Tin-plated

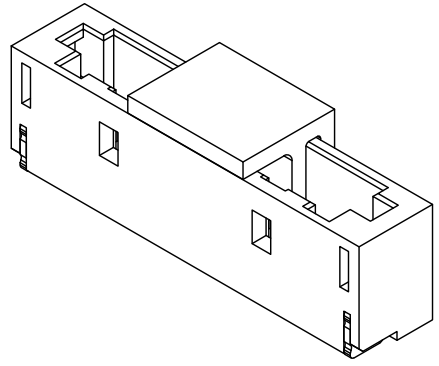

PCB LAYOUT

编号	尺寸 (mm)			
	A	B	C	D
10059-06AB	5.00	12.80	13.75	10.65
10059-10AB	9.00	12.80	13.75	10.65

GENERAL TOLERANCE	
X.X±0.25	X.*±2'
X.XXX±0.10	
X.XX±0.20	

制图	钱岳生
DRAWING	2019、05、13
审核	张名
CHECK	2019、05、14
核准	张名
APPROVAL	2019、05、15
单位	MM
UNITS	比例 SCALE 1:1

料号	10059-10AB	版本	A
PART NO.		REV.	
品名	10059立贴	页次	1/1
TITLE	WAFER SMT TYPE	SHEET	
客户料号			
CUTM. NO.			
乐清市宏一电子有限公司 YUEQING HONGYI ELECTRONICS CO., LTD			