
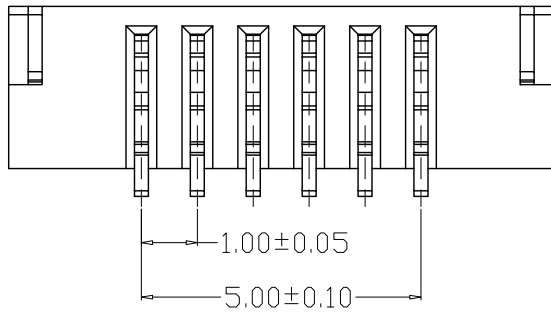
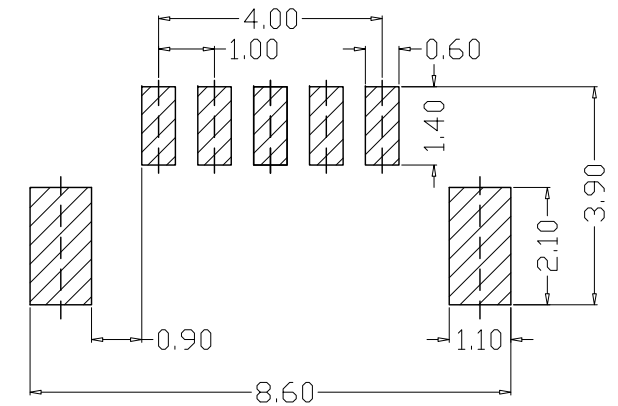
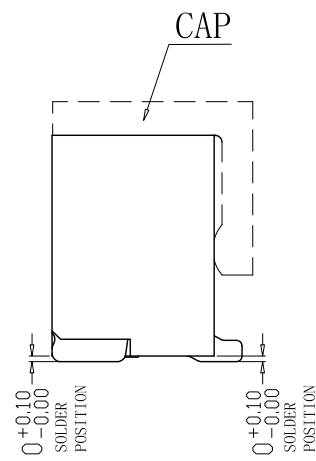
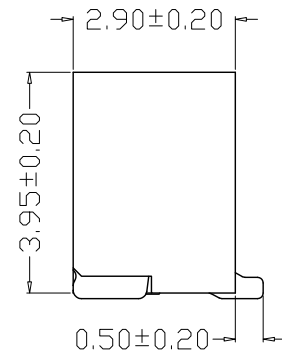
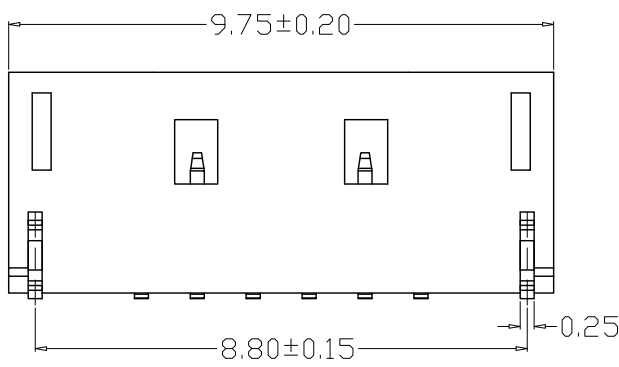
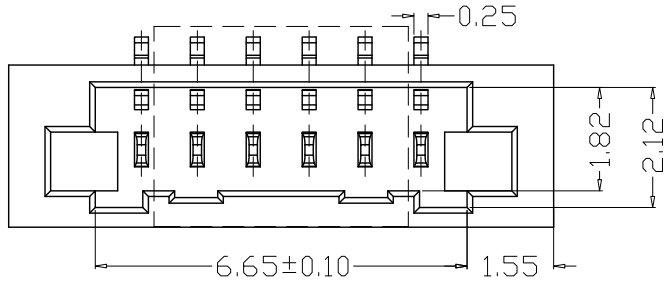


版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- 1、Current Rating: 1.5A AC, DC
- 2、Voltage Rating: 150V AC, DC
- 3、Temperatuer Range: -25°C ~ +130°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 900V AC/minute
- 7、Material
 Wafer: LCP UL94V-0
 PIN: C5191 Tin-plated
 Fixed piece: C2680 Tin-plated

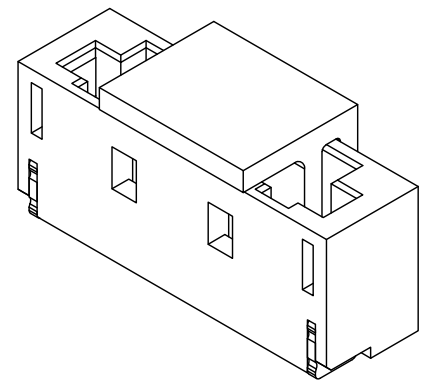

PCB LAYOUT

GENERAL TOLERANCE		制图	钱岳生	料号	10066-6AB	版本	A
X.X±0.25	X.*±2'	DRAWING	2020、05、13	PART NO.	10066立贴	REV.	
X.XXX±0.10		审核	张名	TITLE	WAFER SMT TYPE	页次	1/1
X.XX±0.20		CHECK	2020、05、14	客户料号		SHEET	
		核准	张名	CUTM. NO.			
		APPROVAL	2020、05、15	乐清市宏一电子有限公司 YUEQING HONGYI ELECTRONICS CO.,LTD			
		单位	MM				