
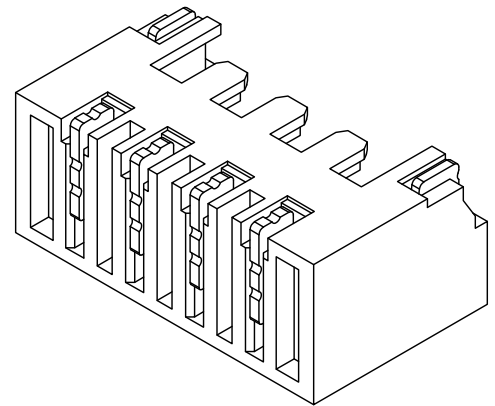





版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

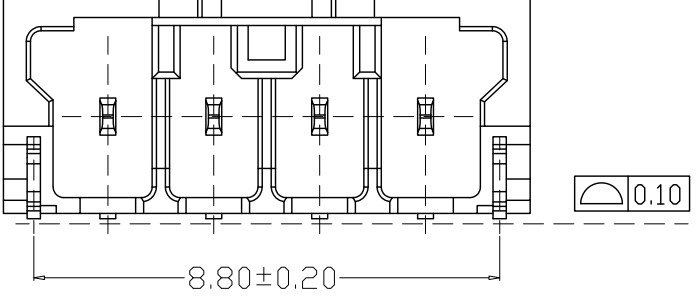


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +130^{\circ}\text{C}$
- 4、Contact Resistance: $30\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material

Wafer: LCP UL94V-0
 PIN: C5191 Tin-plated
 Fixed piece: C2680 Tin-plated

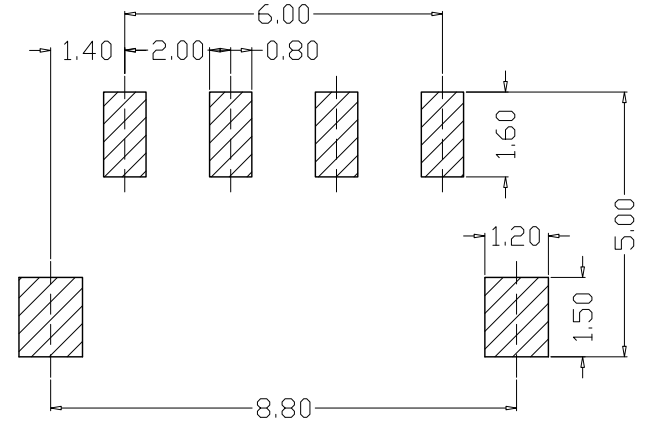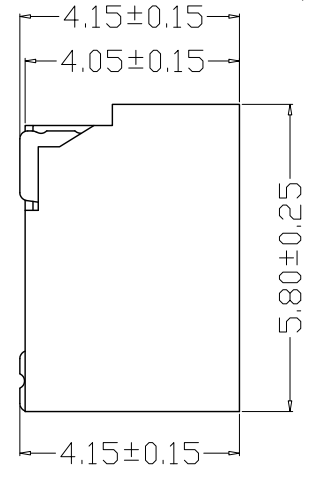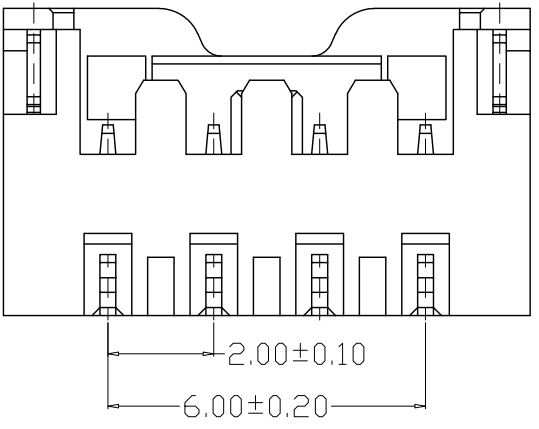

PCB LAYOUT

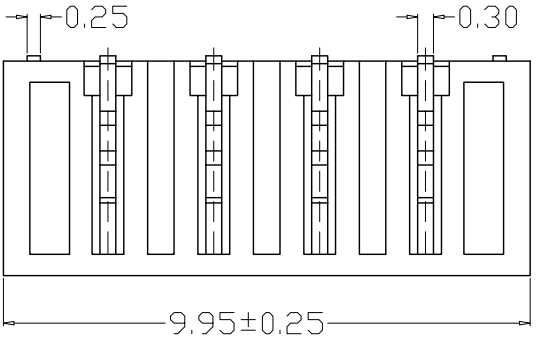

GENEAL TOLERANCE		制图	张迎春	料号	2029-4AWB	版本	A
X.X \pm 0.25	X.* \pm 2'	DRAWING	2022、09、12	PART NO.	2029 $\text{\textcircled{H}}$ 贴	REV.	1/1
X.XXX \pm 0.10		审核	钱岳生	TITLE	WAFER SMT TYPE	SHEET	
X.XX \pm 0.20		核准	张名	客户料号			
		APPROVAL	2022、09、13	CUTM. NO.			
		单位	MM	比例	1:1	乐清市宏一电子有限公司 YUEQING HONGYI ELECTRONICS CO., LTD	