

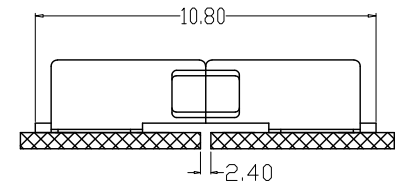
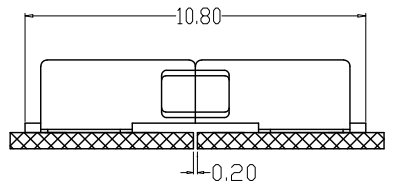


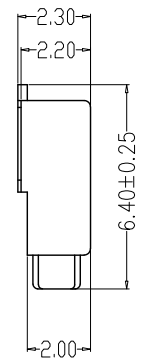
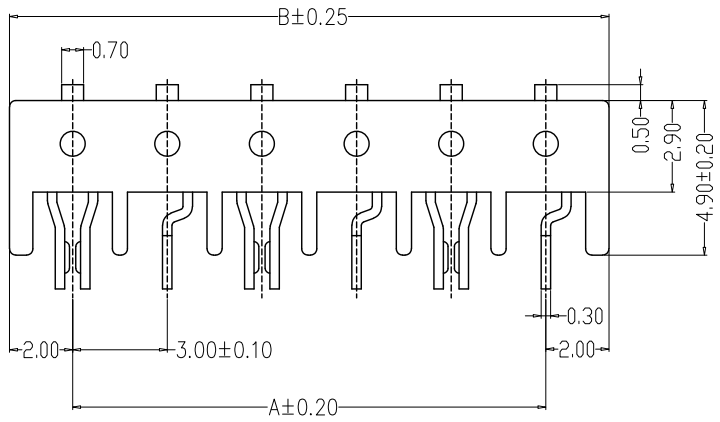



版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN




TYPE 1 MATING VIEW

TYPE 2 MATING VIEW




SPECIFICATIONS


- Current Rating: 3A AC, DC
- Voltage Rating: 300V AC, DC
- Temperatuer Range: -40°C ~ +105°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltang: 1600V AC/minute
- Material: Wafer LCP, UL94V-0
PIN Phosphor bronze Tin-plated




PCB LAYOUT



3.0无极-02A



无极3.0-04A

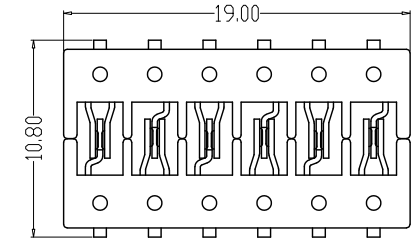

无极3.0-06A

编号	尺寸 (mm)		GENERAL TOLERANCE		制图 Mapping	张迎春 2022、09、17	料号 PART NO.	B30001-nA	版本 REV.	A
	A	B	X.±0.25	X.°±2°						
HY3001-02A	3.00	7.00	.X±0.25	.X°±1°	审核 Audit	钱岳生 2022、09、17	品名 TITLE	无极3.0卧贴 WAFER SMT TYPE	页次 SHEET	1/1
HY3001-04A	9.00	13.00	.XX±0.15	.XX°±0.5°	核准 Approved	张名 2022、09、18	客户料号 CUTM. NO.			
HY3001-06A	15.00	19.00	.XXX±0.10	.XXX°±0.5°	单位 Units	mm	比例 SCALE			

乐清市宏一电子有限公司
YueQing HongYi Electronics Co., Ltd