

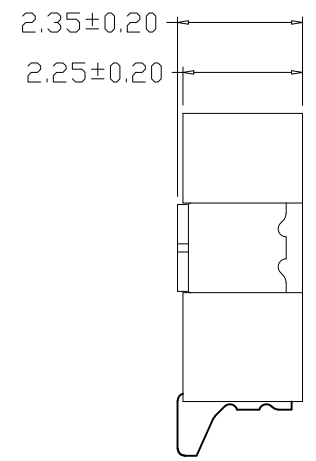
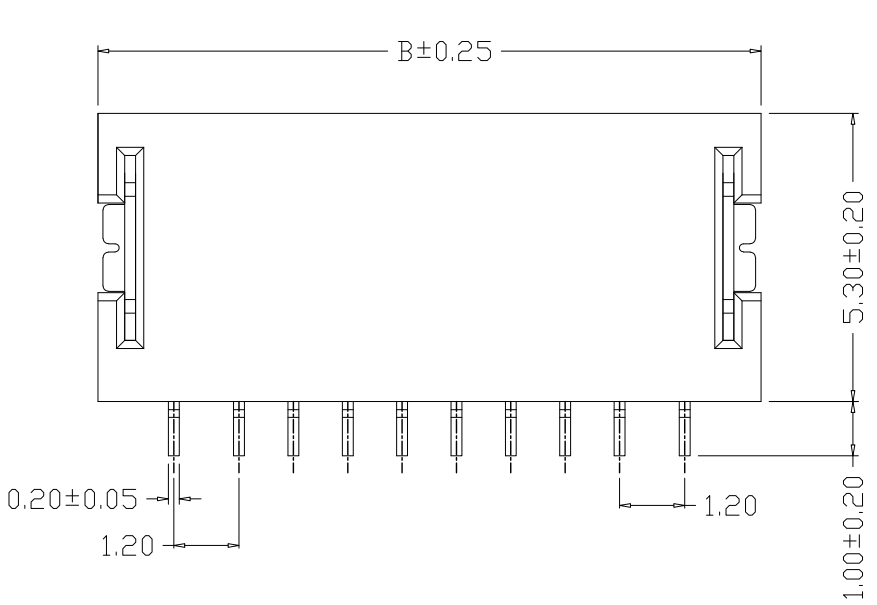


版本 REV.	日期 DATE	变更内容 DESCRIPTION	制图 DRAWN
A/0	2022/11/21	新版本	

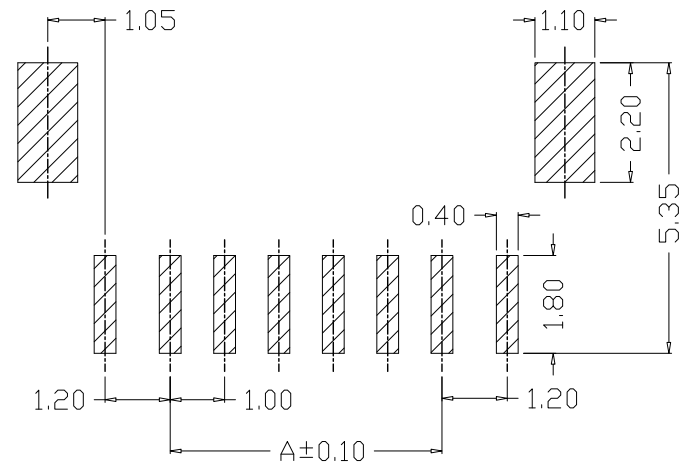

- SPECIFICATIONS**
- Current Rating: 1A AC, DC
 - Voltage Rating: 125V AC, DC
 - Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - Contact Resistance: $20\text{m}\Omega$ Max
 - Insulation Resistance: $100\text{M}\Omega$ Min
 - Withstanding Voltang: 500V AC/minute
 - Material:
 Wafer LCP, UL94V-0
 PIN C5191 Tin-plated
 Solder tad C5191 Tin-plated

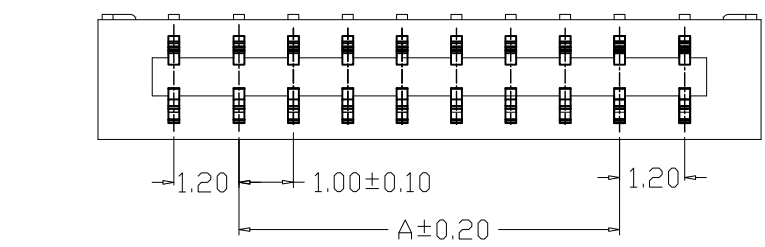

PIN	尺寸 (mm)	
	A	B
4+2AWB	3.00	8.20
5+2AWB	4.00	9.20
6+2AWB	5.00	10.20
7+2AWB	6.00	11.20
8+2AWB	7.00	12.20
9+2AWB	8.00	13.20
10+2AWB	9.00	14.20
11+2AWB	10.00	15.20
12+2AWB	11.00	16.20

PCB LAYOUT

GENERAL TOLERANCE		制图	张迎春	料号	版本
X.X±0.25	X.*±2'	DRAWING	2022、11、21	PART NO.	REV. A/0
X.XX±0.20		审核	钱岳生	品名	页次
X.XXX±0.10		CHECK	2022、11、21	TITLE	SHEET 1/1
		核准	张名	客户料号	
		APPROVAL	2022、11、22	CUTM. NO.	
		单位	MM	乐清市宏一电子有限公司	
		比例	SCALE 1:1	YUEQING HONGYI ELECTRONICS CO.,LTD	