
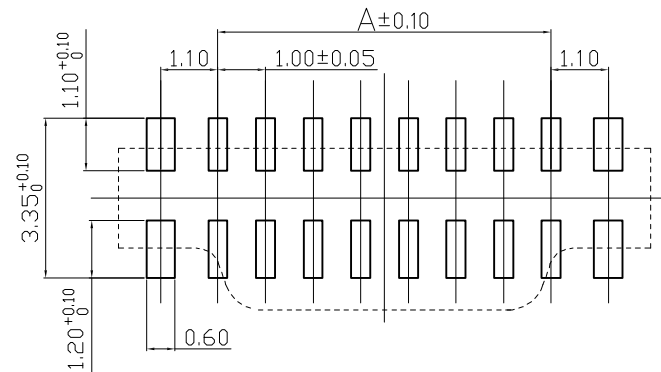


SECTION A-A

SECTION B-B

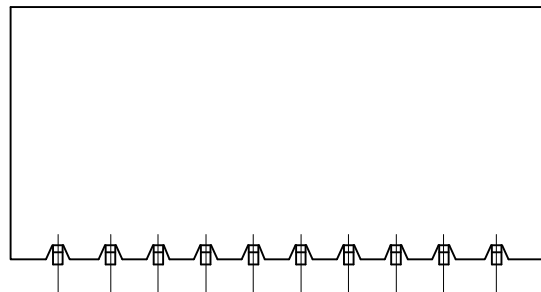

SPECIFICATIONS

- 1、 Current Rating: 1A AC, DC
- 2、 Voltage Rating: 125V AC, DC
- 3、 Temperatuer Range: -25°C~+85°C
- 4、 Contact Resistance: 20mΩ Max
- 5、 Insulation Resistance: 100MΩ Min
- 6、 Withstanding Voltang: 500V AC/minute
- 7、 Material: Wafer LCP, UL94V-0  
PIN Phosphoric copper Tin-plated  
Solder tads Phosphoric copper Tin-plated

编号	尺寸 (mm)		
	A	B	C
(6+2) AB	5.00	8.10	9.20
(8+2) AB	7.00	10.10	11.20
(10+2) AB	9.00	12.10	13.20
(12+2) AB	11.00	14.10	15.20

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 Mapping	钱岳生 2018.05.30		料号 PART NO.	FPC1.0(n+2)大号-nAB		版本 REV.	A
			X±0.25	X*±2'	审核 Audit	张名 2018.05.30		品名 TITLE	FPC1.0(n+2)大号立贴 WAFER SMT TYPE		页次 SHEET	1/1
			.X±0.20	.X*±1'	核准 Approved	张名 2018.05.30		客户料号 CUTM. NO.				
			.XX±0.15	.XX*±0.5'	单位 Units	MM	比例 SCALE	1:1	乐清市宏一电子有限公司 YUEQING HONGYI ELECTRONICS CO., LTD			
			.XXX±0.10	.XXX*±0.5'								