


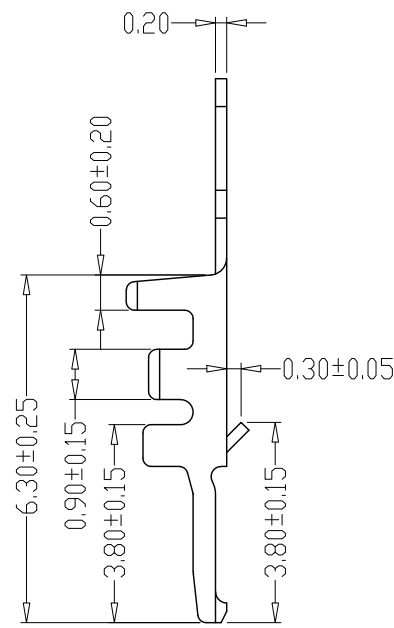



版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

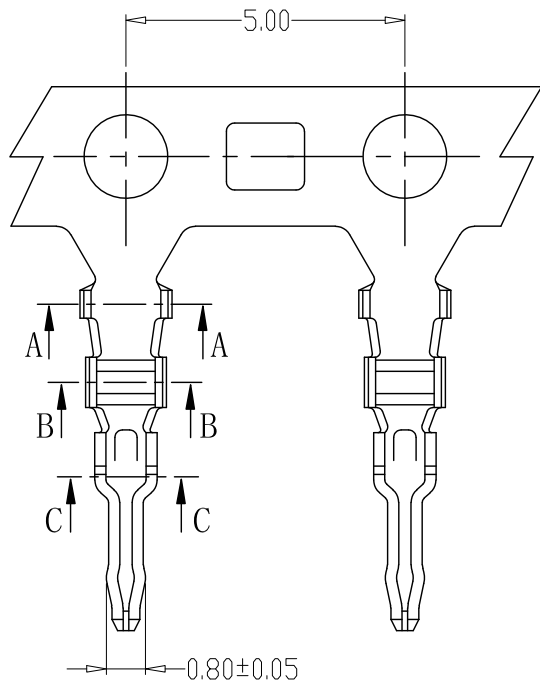

SEC:A-A



SEC:B-B

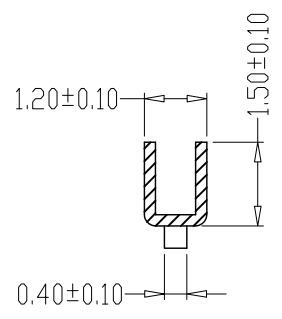

SEC:C-C

SPECIFICATIONS



- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#26~30#

GENREL TOLERANCE		制图 Mapping	张迎春 2023、07、17	料号 PART NO.	A15001-T	版本 REV.	A
X.±0.25	X.°±2°	审核 Audit	钱岳生 2023、07、17	品名 TITLE	ZH1.5直插端子	页次 SHEET	1/1
.X±0.25	.X°±1°	核准 Approved	张名 2023、07、18	客户料号 CUTM. NO.			
.XX±0.15	.XX°±0.5°	单位 Units	mm	比例 SCALE			
.XXX±0.10	.XXX°±0.5°			 乐清市宏一电子有限公司 YueQing HongYi Electronics Co., Ltd			



版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Housing:PA66, UL94V-0

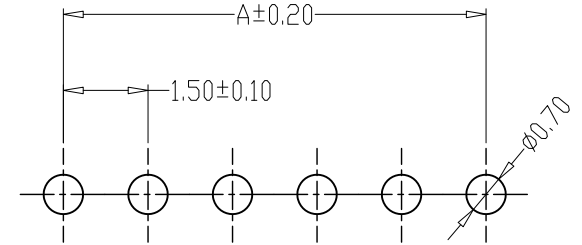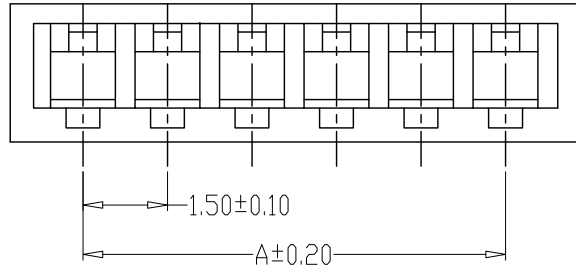

PCB LAYOUT

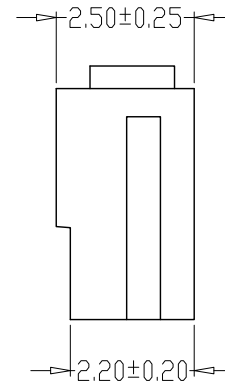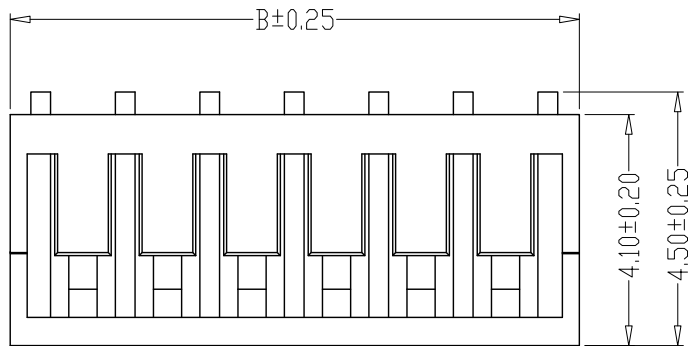

PIN	尺寸 (mm)	
	A	B
-02Y	1.50	4.10
-03Y	3.00	5.60
-04Y	4.50	7.10
-05Y	6.00	8.60
-06Y	7.50	10.10
-07Y	9.00	11.60
-08Y	10.50	13.10
-09Y	12.00	14.60
-10Y	13.50	16.10
-11Y	15.00	17.60
-12Y	16.50	19.10
-13Y	18.00	20.60
-14Y	19.50	22.10
-15Y	21.00	23.60

GENERAL TOLERANCE		制图 Mapping	张迎春 2023、07、17	料号 PART NO.	A15001-nY	版本 REV.	A
X±0.25	X°±2°	审核 Audit	钱岳生 2023、07、17	品名 TITLE	ZH1.5直插	页次 SHEET	1/1
.X±0.25	.X°±1°	核准 Approved	张名 2023、07、18	客户料号 CUTM. NO.			
.XX±0.15	.XX°±0.5°	单位 Units	mm	比例 SCALE			
.XXX±0.10	.XXX°±0.5°			乐清市宏一电子有限公司 Yueqing HongYi Electronics Co., Ltd			